




Digital Label Press and Rotary Die Finisher

Print and finish labels inline


The DLP-2200 can print, die cut, and finish labels at up to 60 feet per minute, making it the fastest and most advanced digital label press in its class. This full-featured workhorse is capable of laminating, die cutting, waste removal, slitting, and rewinding to finished rolls that are ready for application.



High output for large brands and print shops

With the L901 Digital Label Printer inline, the DLP-2200 can **produce more than 25,000 full-color 3x4-inch labels per hour**. For larger brands, this makes it ideal for bringing label production in house. Eliminating the need to outsource labels results in faster turnaround times, greater control and flexibility, and thousands of dollars saved.

The integrated L901's print engine makes printhead maintenance possible with the web intact, allowing for uninterrupted production. In addition, it delivers industry-leading low ink costs via five (CMYKK) high-capacity cartridges.

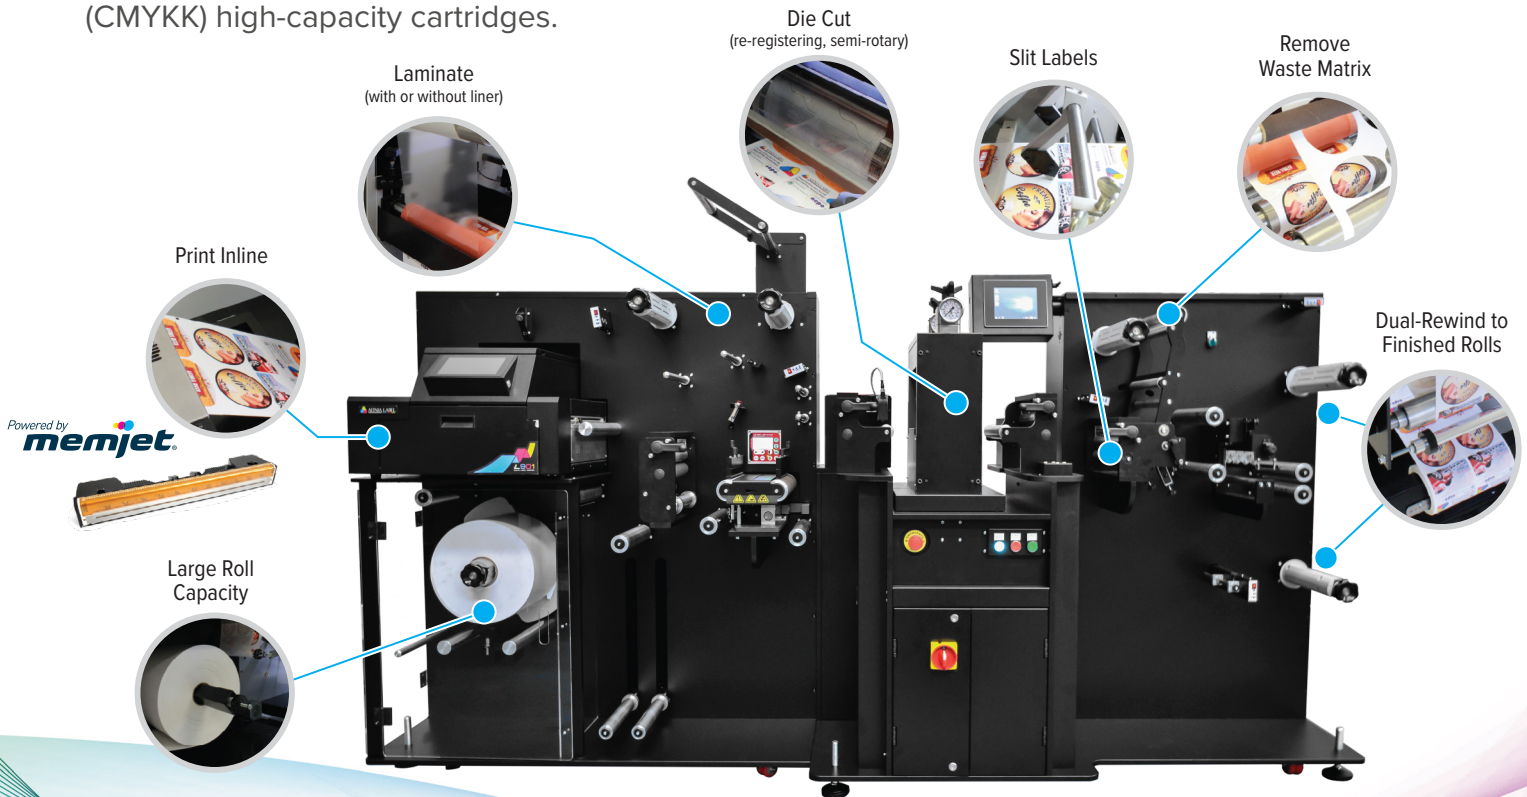

afinialabel.com

US Office
 sales@afinialabel.com
 +1 888.215.3966



UK Office
 sales@afinialabel.co.uk
 +44 (0) 845.250.7949

DLP-2200

Digital Label Press and Rotary Die Finisher

High-capacity finishing

The DLP-2200 is able to accommodate a massive roll of material (400 mm outside diameter), which drastically reduces stock cost from converters, and greatly simplifies operation by avoiding frequent roll changeovers.

A re-registering magnetic cylinder uses easily-swappable flexible steel dies that are low in cost and fast to create. These dies, combined with servo-controlled motors, allow for pinpoint cutting accuracy at high speeds, even with perforations. In addition to inline print applications, the DLP-2200 can be used to convert blank labels.

DLP-2200 Specifications

Print Speed:	30–60 ft/min (6–12 IPS) (9–18 m/min)
Print Quality:	1600 DPI full-color output
Max. Print Width:	8.5" (216mm)
Core Sizes	3" (76 mm)
Max. Laminate / Liner OD	11" (280 mm)
Laminate	Economical, self-wound and supported laminate (on a liner). Liner removal included for use with high quality, liner-supported laminate
Die Head Lateral adjustment	+/- 60mm
Max. Diecutting Width	9" (230 mm)
Max. Diecutting Length	14.17" (360 mm)
Cutting Dies	Flexible steel, from 5.11" (130mm) to 14.17" (360mm)
Registration Sensor / Mark	Laser / 0.2" x 0.2" (5 mm x 5 mm)
Back Slitters	2 - Allows slitting trim to rewind with matrix waste
Max. Finished Label Rewind	15.74" (400 mm)
Max. Waste Matrix Rewind	11.8" (300 mm)
Razor Slitter Assembly	5 inter label knives
Media Capacity	Outside diameter 15.74" (400 mm) on a 3" core (approx. 1000 meters in length)
Dimensions	111.5" (283 cm) L x 65" (165 cm) H x 28.35" (72 cm) W
Power	220V – 1A / 110V – 2A

afinialabel.com

US Office
sales@afinialabel.com
+1 888.215.3966



UK Office
sales@afinia.co.uk
+44 (0) 845.250.7949

AFINIA LABEL